


BAYONET RTD ASSEMBLIES, FIXED LENGTH

- Commonly used models
- Pt-100, 3-wire
- Class A accuracy
- Standard range -50 to 260°C. Other ranges available
- SS316L Sheath
- PTFE insulated and jacketed cables.
- Supplied with 1 meter cable or in multiples thereof
- Bayonet caps & made of nickel plated brass
- Spring length (SL) : 40mm compressed to 15 - 20mm
- Bayonet cap having 12mm inner diameter


OPTIONAL

- Stainless steel over braided cables
- SS304 caps
- 1/4" BSP, M12x1.75, 1/8" BSP bayonet fitting
- Various cable end terminations


MODEL : RPB202






MODEL : RPB212

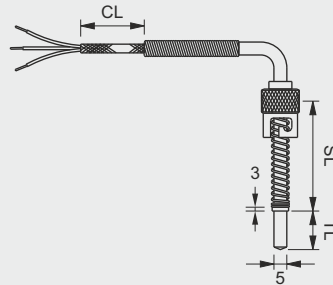


MODEL : RPB232

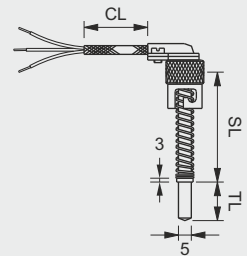


BAYONET ADAPTORS

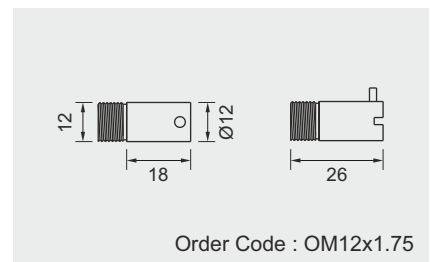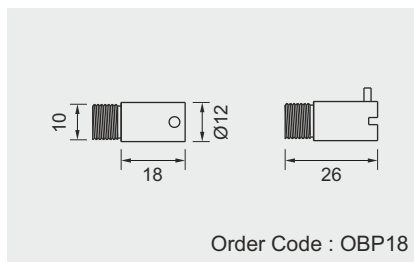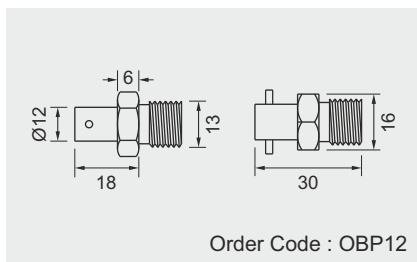

HOW TO ORDER

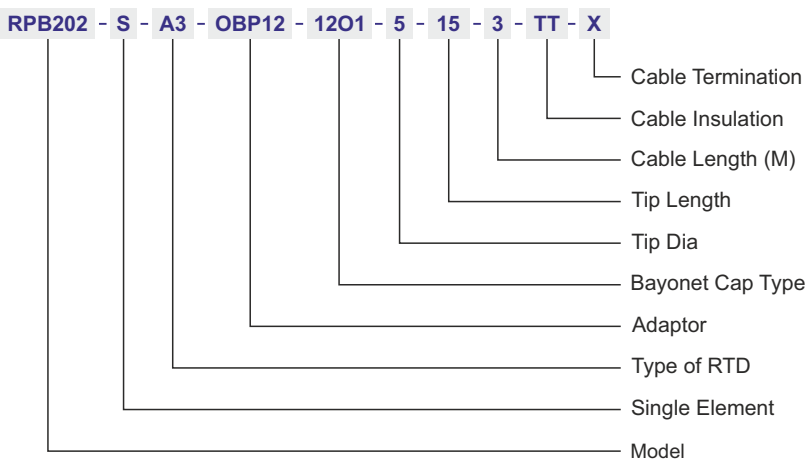

CABLE END TERMINATION STYLES

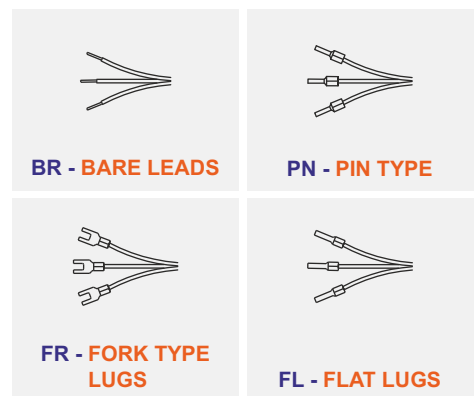

STANDARD BAYONET ADAPTORS

CODE	THREAD	MATL	LENGTH	NO. OF PINS
OBP12	1/4" BSP	BRASS	12	TWO
OBP18	1/8" BSP	BRASS	10	ONE
OM12x1.75	M12x1.75	BRASS	12	ONE

TIP LENGTH

CODE	LENGTH
15	15
20	20
25	25

All dimensions are in mm, unless otherwise specified.

DAT#239R0