

RTD WITH TEFLON INSULATED OUTER SLEEVE

Teflon sleeve protects the sheath from corrosion in highly concentrated acids and alkalis.


- SS316L sheath with TEFLON protective sleeve
- Up to 200°C
- Available up to 400mm length
- 6.5 mm diameter
- Non-bendable sheath

SPECIFICATIONS

	RAA430 / RAA436
Element	Pt-100, 3-wire, Single
Accuracy	Class A
Range	-50 to 200°C
Sheath material	SS316, Teflon Insulated
Sheath diameter (D)	6.5mm
Sheath length (SL)	Upto 400mm


MODEL : RAA430

STANDARD

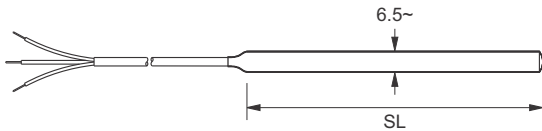


MODEL : RAA436


STANDARD

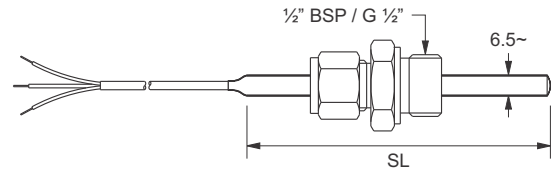

HOW TO ORDER

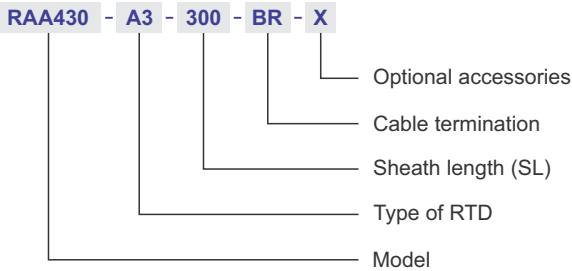

HOW TO ORDER

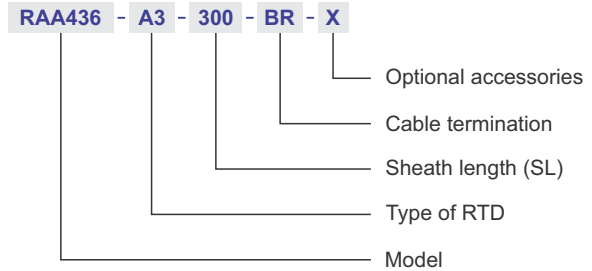


TYPE OF RTD

TABLE R1

CODE	CONNECTION
A3	Pt100, 3 wire
A4	Pt100, 4 wire
B3	Pt500, 2 wire
C2	Pt1000, 3 wire


CABLE END TERMINATION STYLES

TABLE R2

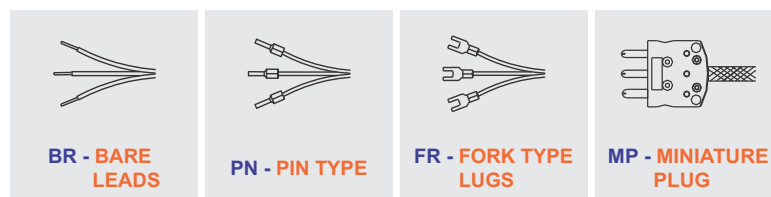

CIRCUIT DIAGRAM

TABLE R3

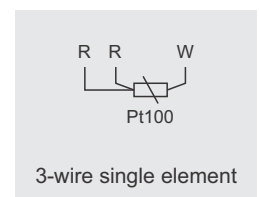

Abbreviations : SL - Sheath Length

All dimensions are in mm, unless otherwise specified.