


RTD WITH FLAMEPROOF TERMINAL HEAD


- RTD's are terminated into Flameproof head suitable for using in hazardous area
- Standard Flameproof heads are certified for using in gas group IIB
- Heads made of die cast aluminium with threaded cap & chain as standard
- 1/2" NPT (F) cable entry

MODEL : RHX200

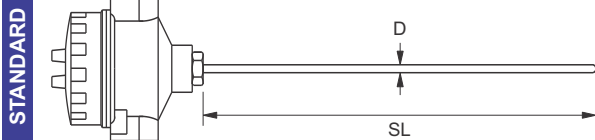


WITHOUT PROCESS CONNECTION

MODEL : RHX202

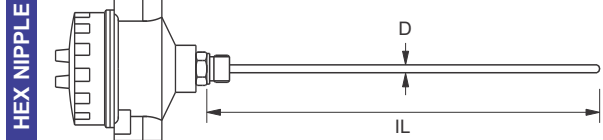


WITH HEX NIPPLE FIXED BELOW HEAD

MODEL : RHX204

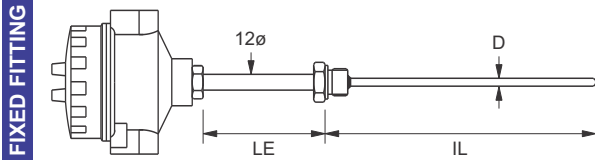


WITH FIXED FITTING AT A DISTANCE

MODEL : RHX206

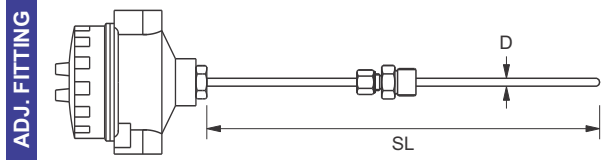


WITH ADJUSTABLE THREADED FITTING

MODEL : RHX207

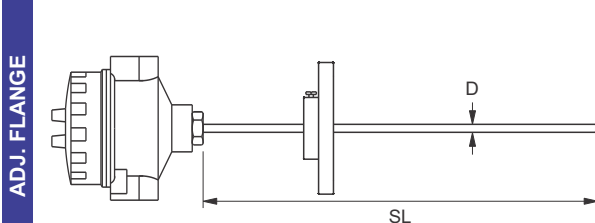

WITH ADJUSTABLE FLANGE

MODEL : RHX300

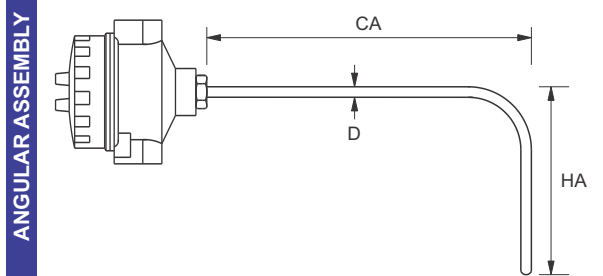

FACTORY BENT ASSEMBLY

OPTIONAL

- Dual Cable entry for IIB & IIC heads
- Flameproof double compression glands
- Polyamide cable gland, ATEX certified
- Head mounted transmitters
- Connecting cables
- Flameproof terminal heads for gas group IIC
- ATEX / IECEx certified terminal heads
- SS304 / SS316 heads

Abbreviations : D - Sheath Dia, IL - Insertion Length, SL - Sheath Length, LE - Lag Extension

All dimensions are in mm, unless otherwise specified.