


WELD-IN, LEAK PROOF

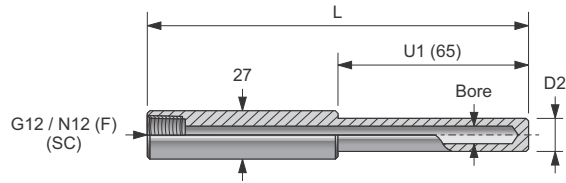

Standard Material : SS304 / SS316
 SC : 1/2" BSP/NPSM
 L : 100 / 150 / 200... upto 1200mm
 Bore : 6.5mm for 6mm dia sensors
 D1 : 27mm
 D2 : 13mm to 16mm, to be specified
 Specify 'U1'
 Other threads, lengths, sizes, materials on request

ORDER CODE

TBR401 - C - 27 - 13 - 6.5 - 65 - 145 - G12 - X

MODEL ————

WELL MATERIAL

CODE	MATERIAL
A	SS304
B	Inconel 600
B1	Inconel 601
B4	Inconel 690
C	SS316
CL	SS316L
D	SS310
E	SS446
F	Carboon steel
BR	Brass
Q	Monel
T	Titanium
U6	Hastalloy C276
U2	Hastalloy C22
X	Other Materials

SHANK OD 'D1' ————

STEPPED TIP DIA 'D2' ————

SENSOR CONNECTION

CODE	THREAD
G12	1/2" BSPP
N12	1/2" NPT/NPSM

OTHER

TOTAL LENGTH 'L'

STEPPED TIP LENGTH 'U1'

BORE

Abbreviations : SC - Sensor Connection, L - Total Length, D1 - Major Diameter, D2 - Minor Diameter, U1 - Insertion Length, Minor Shank

All dimensions are in mm, unless otherwise specified.